


EP-PET4 Plant Extension Timer

Overview

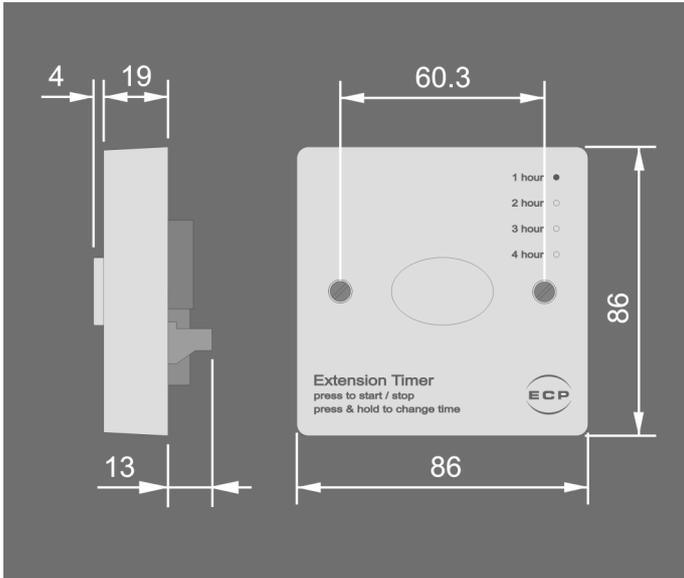


The EP-PET4 Extension timer is a high output electronic timer which provides control for a wide range of loads. The unit allows an appliance to be powered for a set time period which can be adjusted by the user. A simple LED display shows the user how much time is left to run. Pressing the switch whilst the unit is operating allows the user to cancel the timing program, and the memory function of the timer will remember the last time period selected.

To operate the unit, follow these steps:

1. Press the button to start the timing sequence - the last selected time period will be used.
2. As the unit times out the position of the LED will change to show how much time is left. The LED will give a warning flash when 2 minutes are left on the timing sequence.
3. Pressing the button again during timing will turn the unit off.
4. Press and hold the button to set the desired time period (1, 2, 3 or 4 hours). The LED will illuminate next to the selected time. After holding the button for a few seconds the timing will change to the next time period available. Release the button when it illuminates next to the desired time period — the LED will stay on the selected time.
5. When the unit has turned off, it is not necessary to select the time period again, just press the button to repeat the previous time period.

Installation

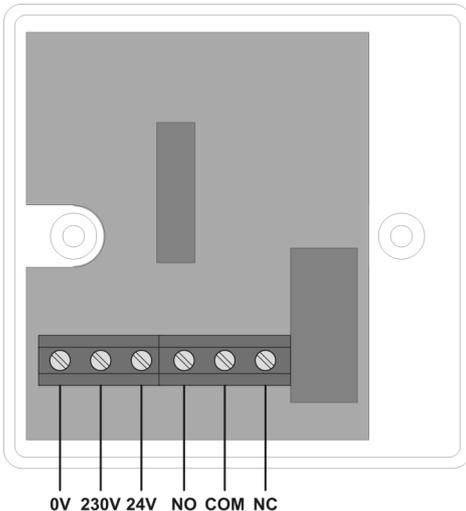

Warning. This device works at mains potential. Be sure to take care when working with electricity.

1. Make sure the load is connected and in working order.
2. If fitting to a metal back box ensure that top and bottom lugs are removed.
3. Isolate the mains supply to the circuit at the main consumer unit.
4. Connect the controller via the terminal block.
5. Screw the unit to the wall and switch the mains supply back on at the distribution board.

Specification

| | | | |
|------------------------|---|-----------------------------------|--|
| LOAD | 16 Amp resistive load (including immersion heaters) 6 Amp fluorescent lighting 3 Amp compact fluorescent lighting 3 Amp low energy lighting 3 Amp low voltage lighting (switch primary of transformer) Fluorescent lighting (max 6 fittings recommended) | FIXING METHOD | Surface fixing 16mm deep plastic surface mount moulded box. Flush fixing 16mm deep steel wall box or 20mm deep cavity wall box. |
| SUPPLY VOLTAGE | 220-240 Volts AC 50 Hz 24VAC/DC +/- 10% | TERMINAL CAPACITY MATERIAL | 4.0mm ² Flame retardant ABS TYPE Class 2 |
| TIME OUT PERIOD | 1, 2, 3 or 4 hours (selectable) | TEMPERATURE CONFORMITY | -10°C to 35°C EMC-89/336/EEC LVD-73/23/EEC |



IMPORTANT NOTICE!

This device should be installed by a qualified electrician in accordance with the latest edition of the IEE wiring regulations.