



RCCB with Over-current protection (RCBO) CA30LE

Description

A range of RCBO units to provide protection against earth fault/leakage current and overload.

Features

- Contact position Indication
- DIN rail mounted




Technical Specification

Rated Voltage:	230/240Vac, 50/60Hz
Short Circuit Capacity:	3kA
Rated Current:	See Order Codes
Rated Residual Operating Current:	30mA
Poles:	1P + n
Tripping Curves:	B, C
Mounting:	DIN rail

Order Codes

CA30LE-6B	Two Pole (1P + N) RCBO 6A Curve B or C 30mA trip
CA30LE-16B	Two Pole (1P + N) RCBO 16A Curve B or C 30mA trip
CA30LE-20B	Two Pole (1P + N) RCBO 20A Curve B or C 30mA trip
CA30LE-32B	Two Pole (1P + N) RCBO 32A Curve B or C 30mA trip
CA30LE-6C	Two Pole (1P + N) RCBO 6A Curve B or C 30mA trip
CA30LE-16C	Two Pole (1P + N) RCBO 16A Curve B or C 30mA trip
CA30LE-20C	Two Pole (1P + N) RCBO 20A Curve B or C 30mA trip
CA30LE-32C	Two Pole (1P + N) RCBO 32A Curve B or C 30mA trip

Curves

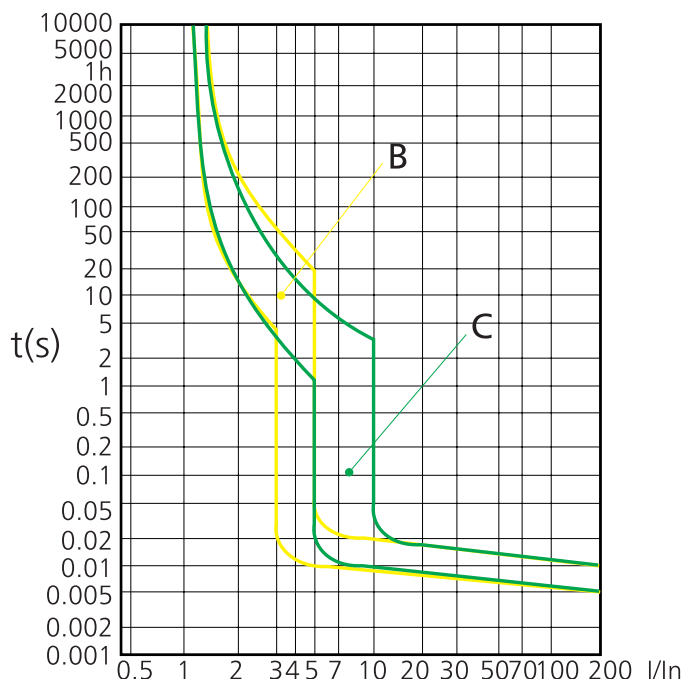

E.C. Products Limited - Head Office

EC House, Amberley Way, Hounslow
Middlesex, TW4 6BH, United Kingdom

Tel: +44 (0)20 8569 4100 Fax: +44 (0)20 8569 4111