



# 8 Port Ethernet Switch IES-0008T

## Description:

The unmanaged 8-port switch is specially designed for automation control applications. It is equipped with one fast Ethernet fiber/RJ45 optional port and 6 10/100Base-TX RJ45 ports. It supports SC/ST/SFP type fiber ports, redundant power inputs, metal housing with IP30 protection class, thus ensuring fast and reliable data transmission in harsh industrial environments. It provides both standard (-10°C to 60°C) operating temperature range model and wide (-40°C to 75°C) operating temperature range models to meet different applications.





## Features:

- 8 Port 10/100 Mbs Ethernet Switch
- 1 Fast ethernet fibre/RJ45 optional port, 4 x 10/100 Base t(x) ports
- Redundant dual power inputs: 12-48VDC/18-30VAC
- Din Rail Mount
- Industrial temperature range
- Metal Housing

## Technical Specification:

<b>MAC Table:</b>	2K
<b>Packet Buffer:</b>	1Mbit
<b>Packet Forwarding Rate:</b>	1.2Mpps
<b>Switching Delay:</b>	<10µs
<b>Fast Ethernet Port:</b>	100Base-FX, SM/MM, SC/ST connector
	100Base-X, SFP slot
	10/100Base-T(X), RJ45 port
<b>Power LED:</b>	PWR1, PWR2
<b>Interface LED:</b>	Link/ACT, Speed (RJ45 port); Link/ACT (Fibre port)
<b>DIP-Switch:</b>	Enable/Disable broadcast storm protection
<b>Power Input:</b>	12-48VDC/18-30VAC
<b>Power Terminal:</b>	4-pin 5.08mm-spacing plug-in terminal block
<b>Power Consumption:</b>	<4.6w
<b>Overload Protection:</b>	Support
<b>Reverse Protection:</b>	Support
<b>Redundancy Protection:</b>	Support
<b>Housing:</b>	Metal
<b>Cooling:</b>	Natural convection, fan-less
<b>Protection Class:</b>	IP30
<b>Dimension:</b>	46mm×115mm×68mm (W×H×D)
<b>Weight:</b>	0.32Kg
<b>Mounting:</b>	DIN-Rail or Panel Mounting
<b>Operating Temperature:</b>	-10°C to +60°C
	-40°C to +75°C
<b>Storage Temperature:</b>	-40°C to +85°C
<b>Ambient Relative Humidity:</b>	5-95% (non-condensing)

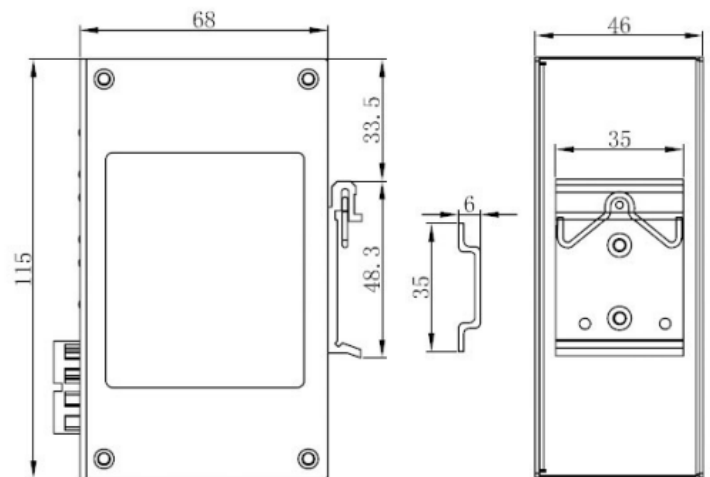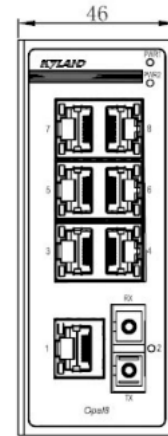

## Order Code:

IES-0008T

8 Port Ethernet Switch 24VAC/DC

## EC Products Limited

EC House, Amberley Way, Hounslow,  
Middlesex. TW4 6BH. United Kingdom  
Tel:+44 (0)20 8569 4100 Fax: +44 (0)20 8569 4111